

Néodyl®

Waterproofing system for structural expansion joints



► Ensures the continuity of the waterproofing between different structures

► Convenient: applied by traditional torch-welding

► Suitable for all roof substrates

Packaging

The Néodyl System comprises the Joint Néodyl waterproofing strip, the Cordon Néodyl preformed packing cord and a protection system

■ Joint Néodyl strip

Length: 10m
Widths: 1.00, 0.66, 0.5 and 0.33m
Weight/roll (approx.):
1.00m: 62kg
0.66m: 40kg
0.50m: 31kg
0.33m: 20kg


■ Cordon Néodyl cord

Diameter: 3cm
Length: 10m
Weight: 11kg

Main uses

Waterproofing for expansion joints on accessible roofs (pedestrians), roof gardens and inaccessible roofs.

Description

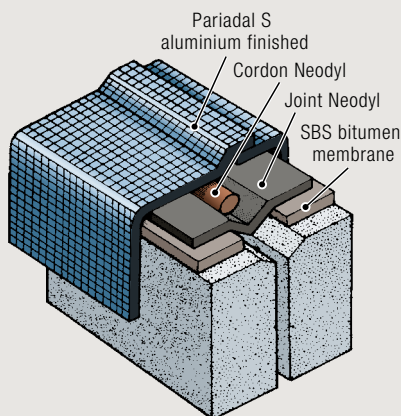

Joint Néodyl strip

- SBS elastomeric bitumen binder, but without reinforcement.
- Thickness of the strip: 5mm.
- Surfacing: both faces covered with non woven synthetic fibre.

Cordon Néodyl cord

- Flexible extruded cord made from synthetic rubber.

Performances

Joint Néodyl strip

- Modulus at 100%: 90 daN/cm².
- Elasticity range: 100%.
- Cold flexibility: -25°C.
- Tearing resistance at 20°C: no tearing after 1,000% elongation.
- Heat flow: ≤2mm (90°C/2h).
- Thermal stability: 1mm per meter at +80°C

Cordon Néodyl cord

- No absorption of water.
- Elongation at break: >200%.
- Heat resistance: continuously from -50°C to +80°C.

Complementary information

- Avis Technique French Agrément.

Customs nomenclature

- Joint Néodyl: 60.07.10.19.0.00.0.P
- Cordon Néodyl: 40.08.19.00.0.00.0.I

Safety

Néodyl is not rated as dangerous (for the applications described in this document).

This document is only a guide. Siplast-Icopal reserves the right to change the composition and fixing recommendations of products as a result of evolution of knowledge and technology.



12, rue de la Renaissance
92184 Antony Cedex
Tél. +33 (0)1 40 96 35 00
Fax. +33 (0)1 40 96 35 07
www.siplast-international.com

ISO 9001
BUREAU VERITAS
Certification



Awarded to all sites of the company